


## NISSAN GQ/GU Castor Correction Bushes

Using the diagram below lay the arm on the image and mark positions of bushes prior to assembly.

Correct fitment will leave a distance of 240mm between hole centres for Nissan Patrol.

Repeat for opposite arm.

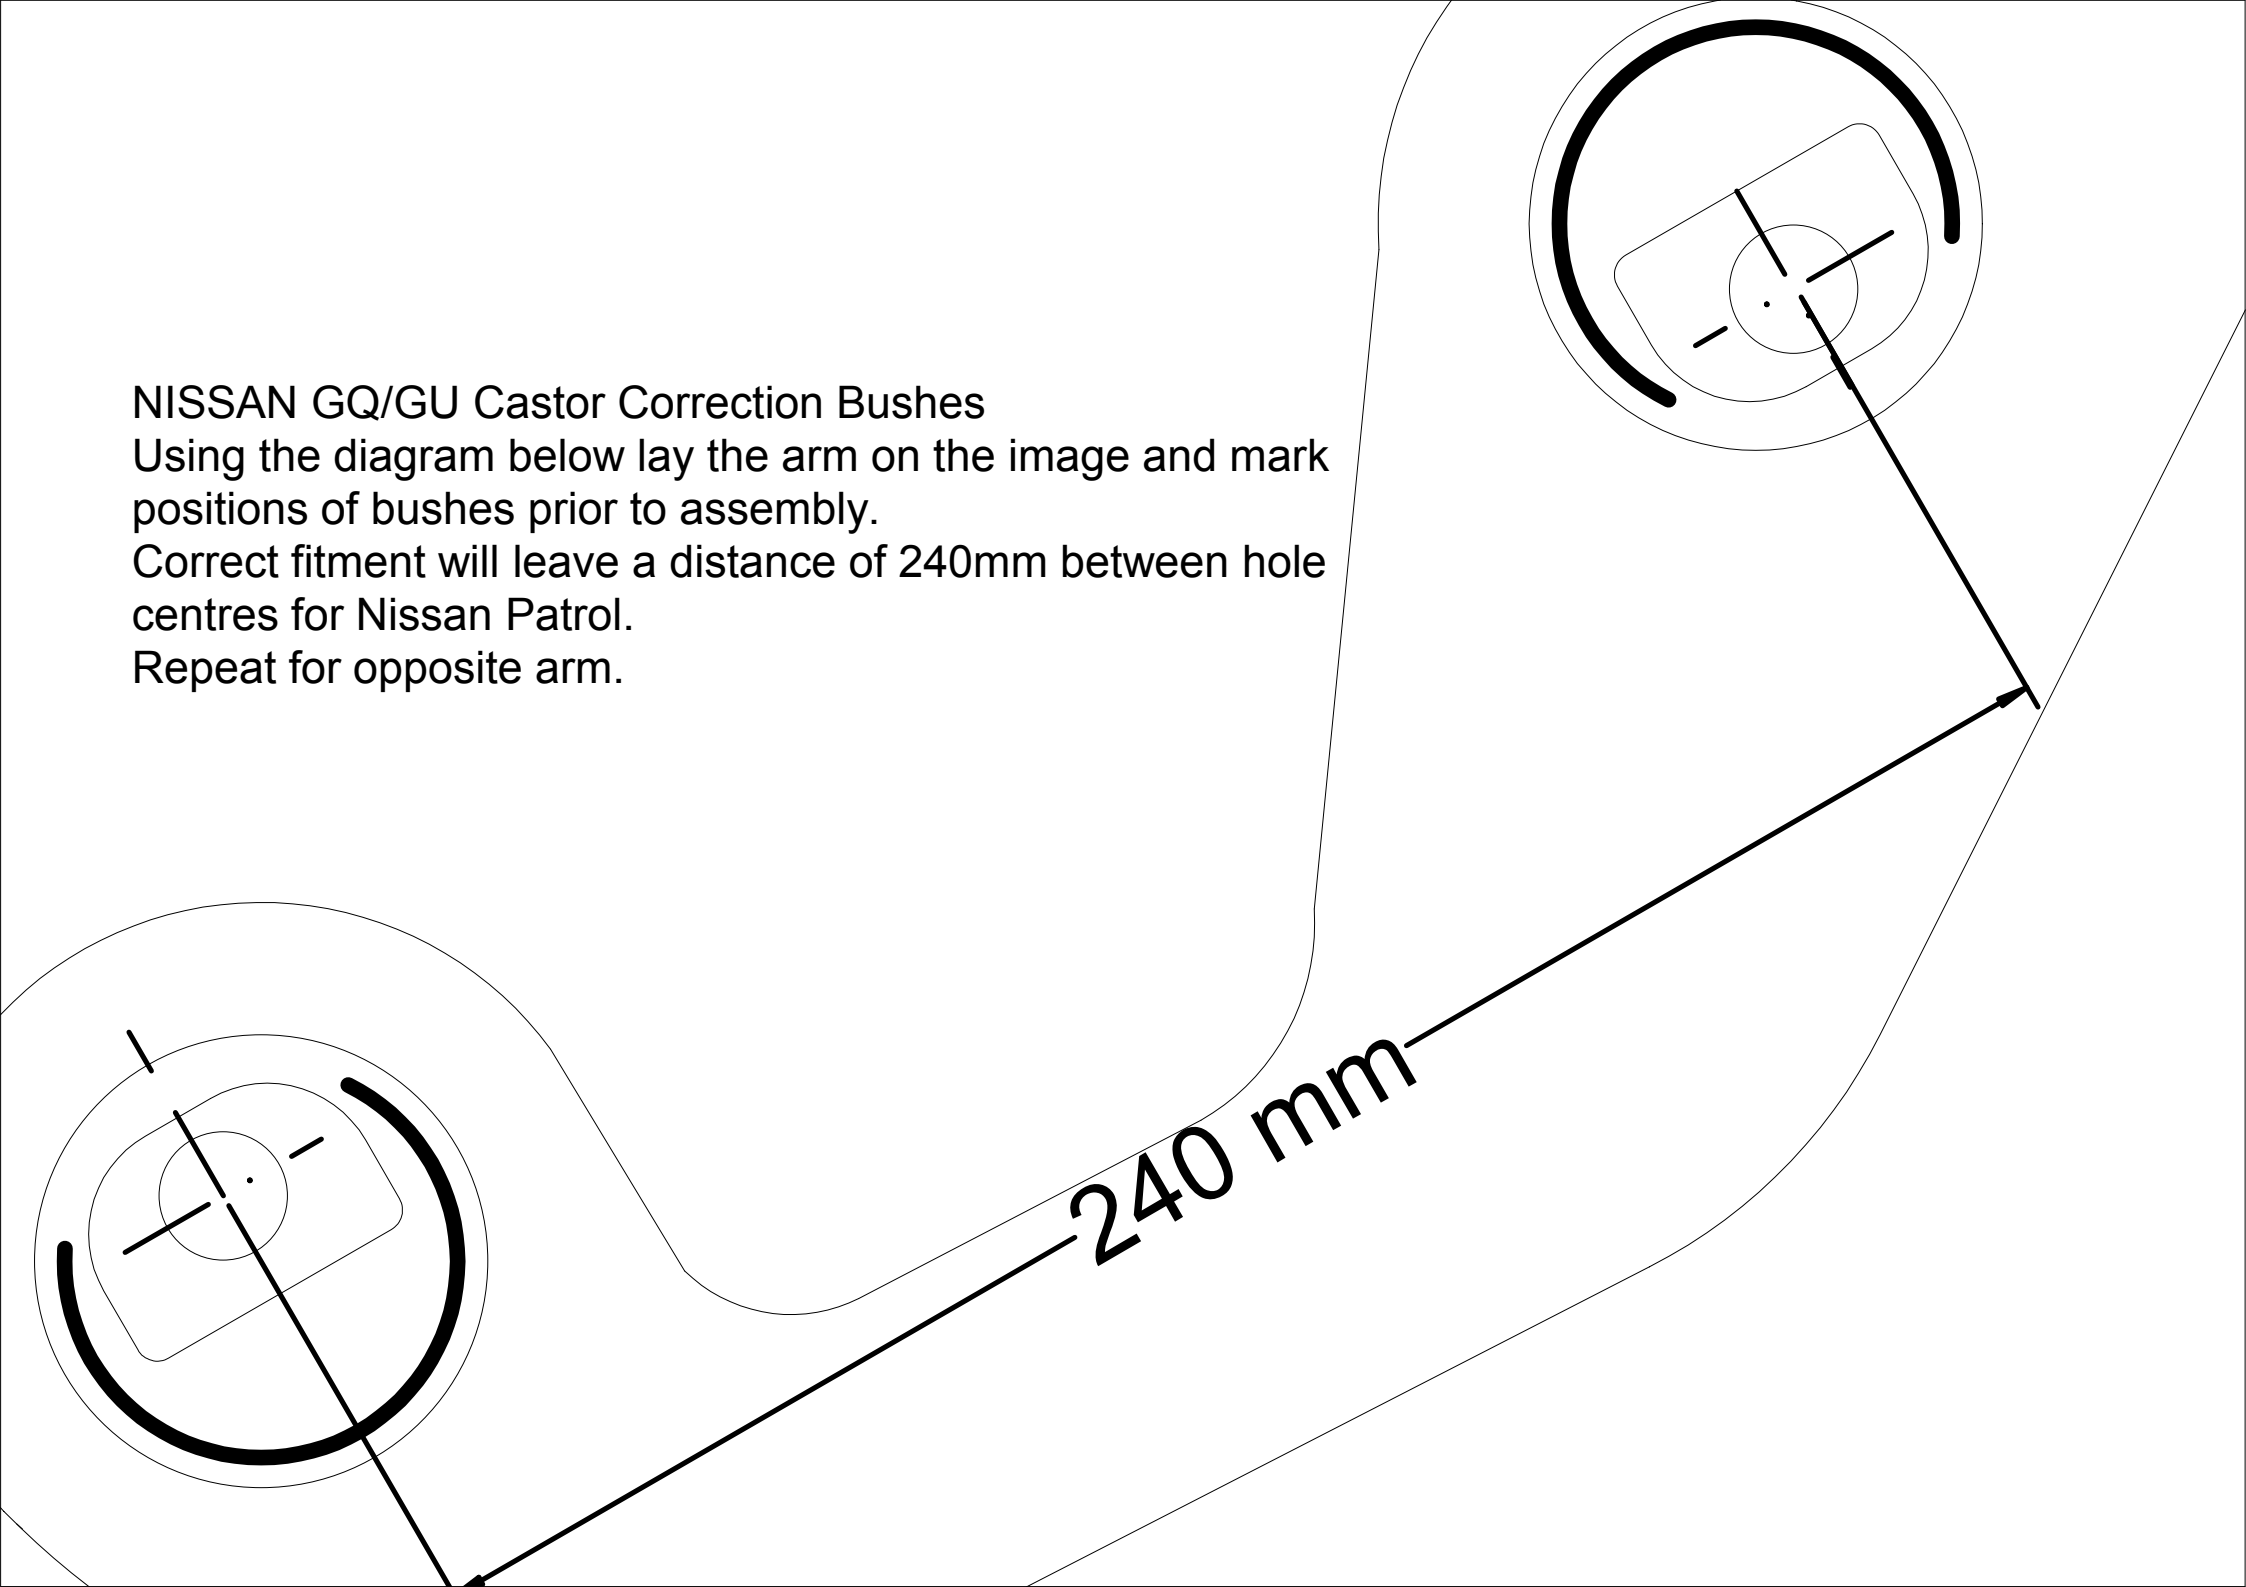

172115 B

## TOYOTA LANDCRUISER 80 & 100 SERIES

Fitment for drivers side and passenger side trailing arms to increase caster. Tube fitment is identical for both arms.

Lay the trailing arm on this template and mark the bushes as indicated.

Press in the bushes with the hole closest to the mark. Distance between hole centers must be  $185 \pm 0.5\text{mm}$  for easy fitting.

**FRONT**

